


AIRTEX[®] PP UND AIRTEX[®] UV extra

adhesive tapes for interior and exterior use

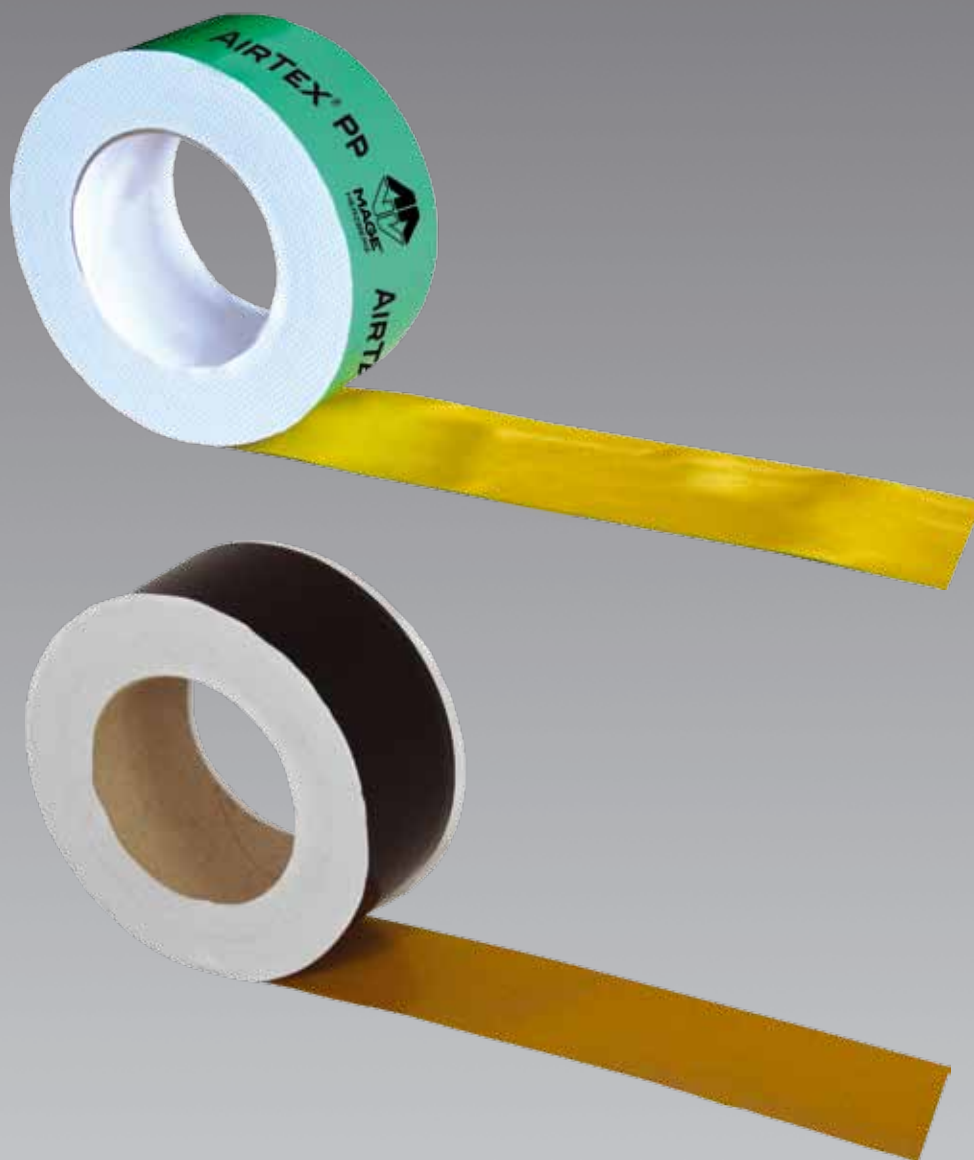

PRODUCT INFORMATION

AIRTEX® PP UND AIRTEX® UV extra



AIRTEX® PP

- Carrier: LDPE foil green, reinforced with PES/PVA diagonal mesh non-crimp fabric
- Adhesion: solvent-free non-embrittle modified acrylic adhesion
- Interliner: tear-resistant release paper
- Extremely high tack
- Excellent adhesion also on open-grained and rough materials (OSB, chipboards...)
- Outstanding humidity- and climatically resistance
- fiber-reinforced
- 6 month natural weathering

AIRTEX® UV extra

- Carrier: polymer PVC foil black, reinforced with PES/PVA diagonal non-crimp fabric
3000 h - UV-stable (according to WOM and QUV-B-test) 5 years UV-stable*
- Adhesion: solvent-free non-embrittle modified acrylic adhesion
- Interliner: tear-resistant release paper
- Extremely high tack
- Excellent adhesion also on open-grained and rough materials (OSB, chipboards...) as well as curtain panels
- Outstanding humidity- and climatically resistance
- fiber-reinforced
- 6 month natural weathering

*For Central Europe under the current climatic conditions.

TECHNICAL INFORMATION

The substructures have to be dry, clean, free of dust and grease and stable when handling with the adhesive strips.

The adhesion has to be done with adequate contact pressure – generally: higher contact pressure means better tack.

The adhesive tapes assume the function of sealing not of a force-locked connection.

The processing has to be done according to DIN-EU standards, with attention of the ZVDH guideline.

AIRTEX® PP

roll width:	60 mm (2.36 in)
roll length:	25 m (984.25 in)
packaging:	10 rolls per box
adhesion grammage:	250 g/m ²
thickness:	0,32 mm (0.013 in)
release paper:	90 g/m ² , yellow
tack:	at least 35 N/25 mm (0.98 in) contact time 1 hour (according to AFERA 5001)
processing temperature:	starting at -10°C / optimal starting at 15°C

AIRTEX® UV extra

roll width:	60 mm (2.36 in)
roll length:	25 m (984.25 in)
packaging:	10 rolls per box
adhesion grammage:	230 g/m ²
thickness:	0,33 mm (0.013 in)
release paper:	90 g/m ² , yellow
tack:	at least 28 N/25 mm (0.98 in) contact time 1 hour (according to AFERA 5001)
processing temperature:	starting at -10°C / ideal starting at 15°C